



Spicer® Electrified™ e-Gearbox


3e2

Benefits


- High-speed reduction unit for compact construction equipment
- Allows the use of high-speed motors with standard Dana drivelines (1- or 2-speed)
- Compact and modular solution
- Speed range and performance in line with hydrostatic motor

Features

- Maximum output speed: 3600 RPM
- Peak output torque: 1400 Nm
- Peak output power: 100 kW
- Continuous output power: 100 kW
- DC voltage range (V): 300 to 750 V
- Maximum continuous current (A): 350 A

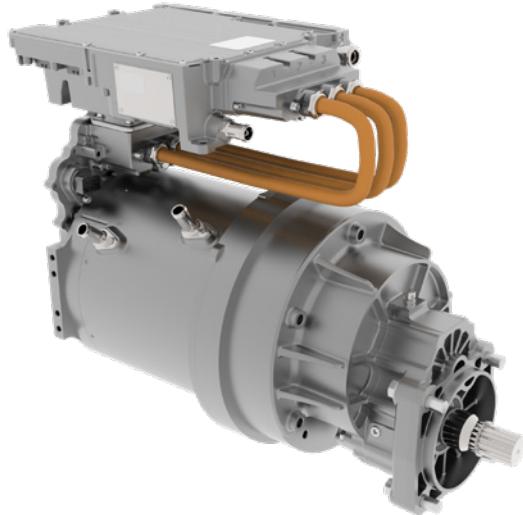

Ideal for Mobile Elevated Work Platforms



Dana.com/Electrified

Application Policy

Capacity ratings, features, and specifications vary depending upon the model and type of service. Application approvals must be obtained from Dana; contact your representative for application approval. We reserve the right to change or modify our product specifications, configurations, or dimensions at any time without notice.