


BSH5... SUBPLATES MOUNTING FOR ADH5 TYPE PILOTED VALVES CETOP 5/NG10

1

BSH513 WITH P, T AND A, B REAR 3/4" BSP, X AND Y CLEARANCE HOLES

- BSH** Single plate for piloted valve
- 5** CETOP 5/NG10
- 13** 3/4" BSP rear connectors
- 00** No variant
- 1** Serial No.


Weight: 3,8 Kg
Fixing screws M6x50 UNI 5931

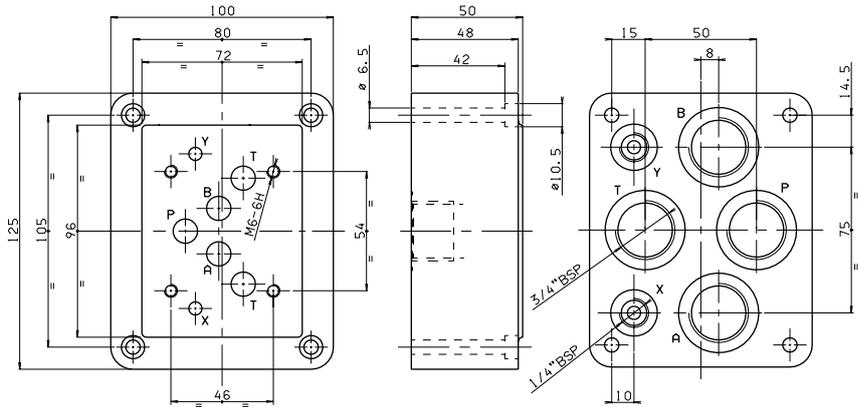

BSH517 WITH P AND T REAR AND A, B SIDE 3/4" BSP, X AND Y CLEARANCE HOLES

- BSH** Single plate for piloted valve
- 5** CETOP 5/NG10
- 17** 3/4" BSP rear and side connectors
- 00** No variant
- 1** Serial No.


Weight: 3,9 Kg
Fixing screws M6x50 UNI 5931

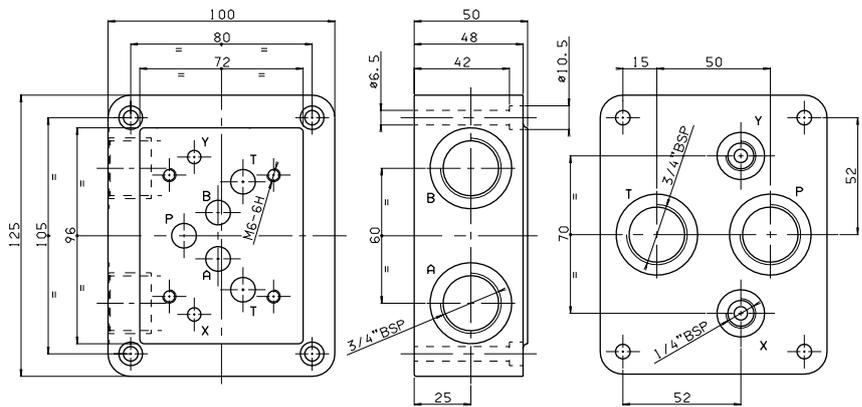

BSH531 WITH P AND T REAR, A AND B SIDE 3/4" BSP, X AND Y CLEARANCE HOLES WITH MAXIMUM PRESSURE VALVE

- BSH** Single plate for piloted valve
- 5** CETOP 5/NG10
- 31** 3/4" BSP rear and side connectors
- *** **M** = Plastic knob
C = Grub screw
- *** Setting ranges
1 = Max 50 bar
2 = Max 140 bar
3 = Max 320 bar
- **** **00** = No variant
V1 = Viton
- 2** Serial No.

Weight: 5,5 Kg
Fixing screws M6x75 UNI 5931

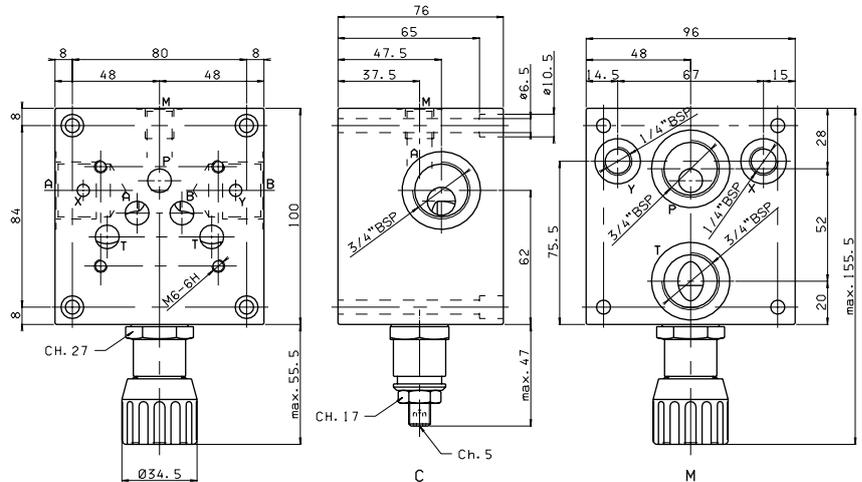

•For the minimum permissible setting pressure depending on the spring, see minimum setting curve pressure CMP30