



## INTERMEDIATE ELEMENT FOR PRE AND POST COMPENSATED VALVES

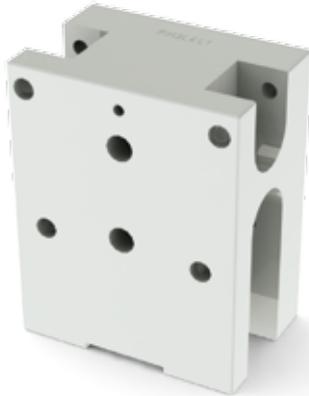

Intermediate element FIH3L with pass through P-T and LS lines.

- Suggested in assemblies with more than 8 elements in order to give better support and stability.
- Maximum flow 80 l/min.
- Cast iron zinc plated body or aluminum (AL variant).

### HYDRAULIC SYMBOLS



### ORDERING CODE

<b>FIH</b>	Intermediate element
<b>3</b>	Size
<b>L</b>	With LS line
<b>**</b>	<b>00</b> = No variant (cast iron body) <b>AL</b> = Aluminum body <b>V1</b> = Viton
<b>1</b>	Serial No.

### FEATURES

Max. operating pressure	300 bar (cast iron) 250 bar (aluminum)
Max. Flow	80 l/min
Hydraulic fluid	DIN 51524 Mineral oils
Fluid viscosity	10 ÷ 500 mm <sup>2</sup> /s
Fluid temperature	-25°C ÷ 75°C
Ambient temperature	-25°C ÷ 60°C
Max. contamination level (filter $\beta_{25} \geq 75$ )	ISO 4406:1999: class 21/19/16 NAS 1638: class 10
Weight	1.6 kg (cast iron) 0.59 kg (aluminum)

Mounting kit (screws and tie rods) contact our customer service.

### OVERALL DIMENSIONS

