

AM88... MODULAR COMPENSATED FLOW CONTROL ASSEMBLY CETOP 5



This is an intermediate block (AM88) for modular mounting of one or two compensated flow rate regulators QC3...

The flow regulator type QC32 must be ordered separately.


Max. operating pressure	320 bar
Hydraulic fluids	Mineral oils DIN 51524
Fluid viscosity	10 ÷ 500 mm ² /s
Fluid temperature	-25°C ÷ 75°C
Ambient temperature	-25°C ÷ 60°C
Max. contamination level	class 10 in accordance with NAS 1638 with filter $\beta_{25} \geq 75$
Weight	2,75 Kg

AM88...	
QC32...	CAP. III • 2
SCREWS AND STUDS	CAP. IV • 36


ORDERING CODE

AM	Modular valve
88	Size
**	Control on lines A / B / P / T / PT* / AB For A1 / B1 / A1B1 see table "Hydraulic symbols"
**	00 = No variant V1 = Viton
3	Serial No.

HYDRAULIC SYMBOLS

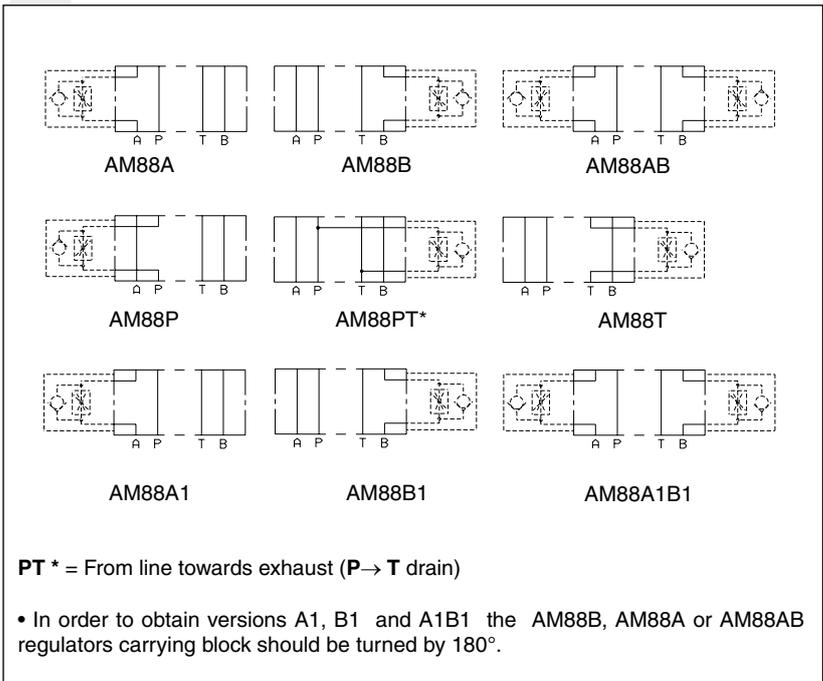

OVERALL DIMENSIONS

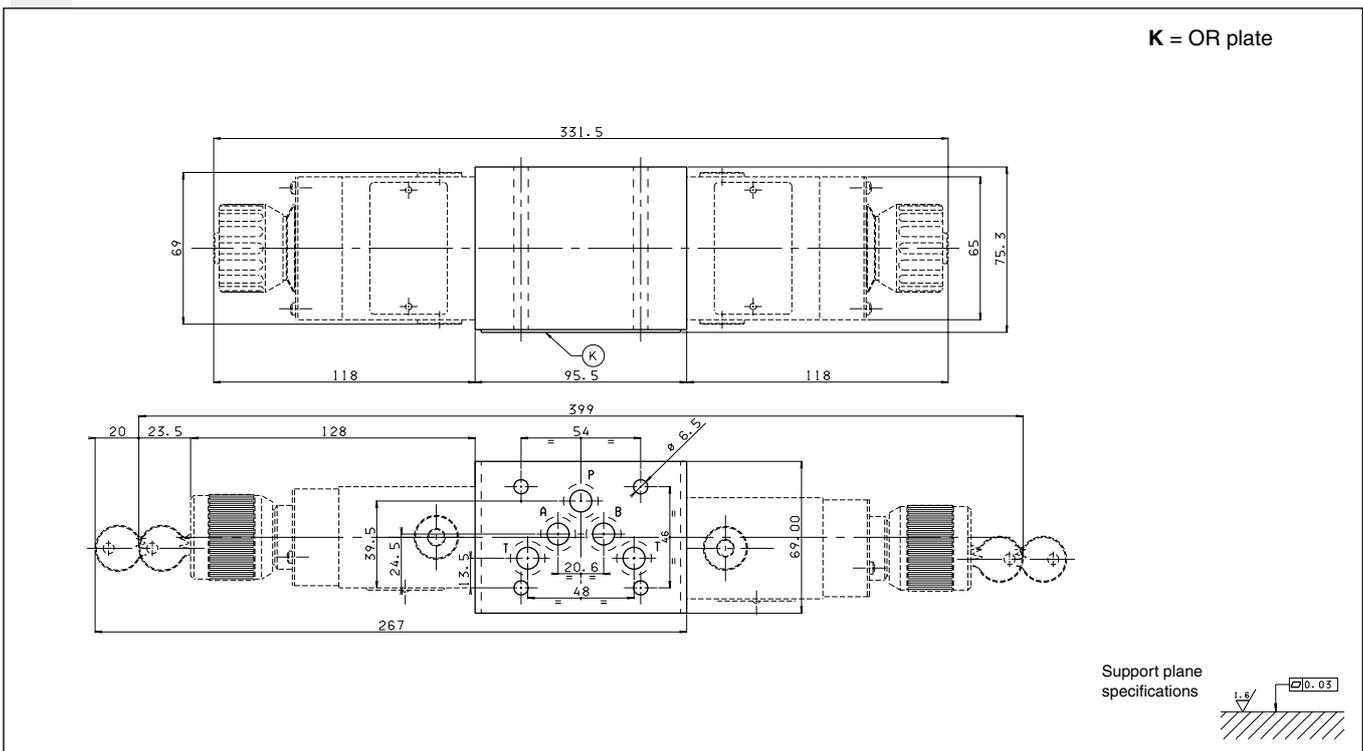

4