



"LF" AND "LR" VARIANTS - EMERGENCY CONTROL LEVER

1

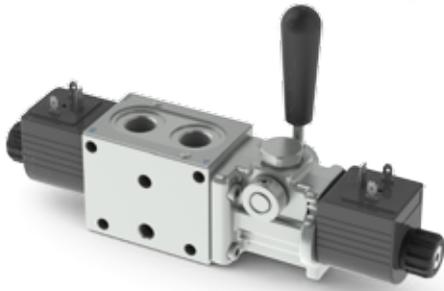

Thanks to his flexibility, the component is designed to be inserted between the valve body and the spool, providing total interchangeability between the different types of solenoid body valves manufactured by Dana Brevini. The control can be used as an emergency device in the event of power cuts.

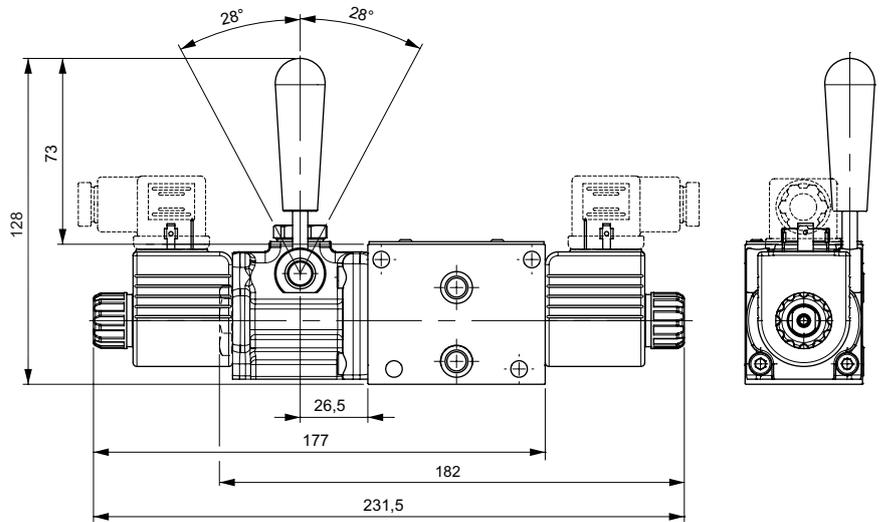


LF variant

HYDRAULIC SYMBOL




Max operating pressure port T	dynamic	160 bar
	static	210 bar
Max operating pressure port P for series connection configuration		160 bar
Mounting type		C - F - H
Spools type		01 - 02 04 - 16
Weight with single solenoid	CDC3	2.21 kg
	CDCM3	2.36 kg
Weight with double solenoid	CDC3	2.46 kg
	CDCM3	2.61 kg

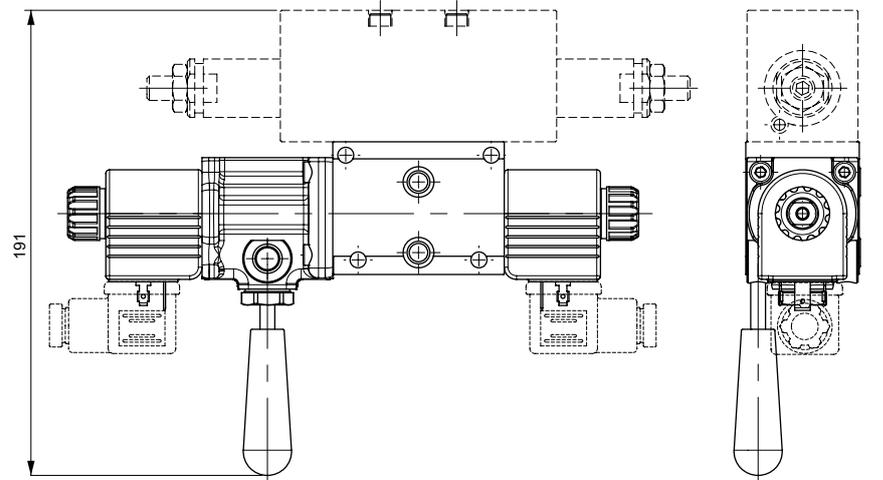

LR variant

OTHER VARIANTS

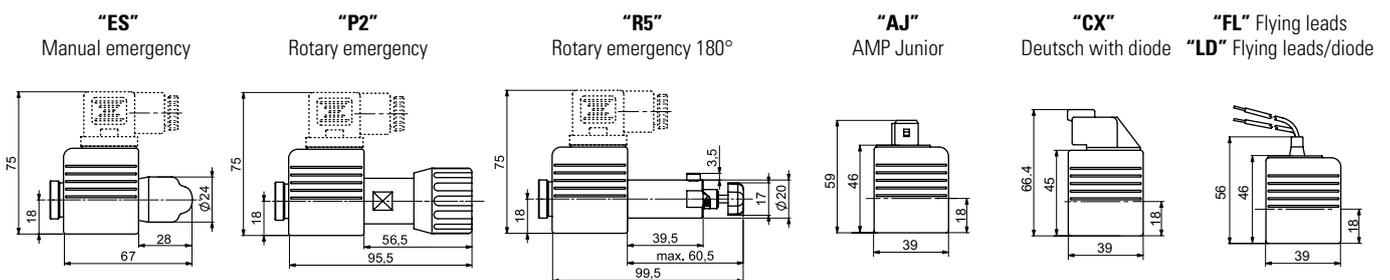

Emergency P2 and P5, tightening torque max. 6÷9 Nm (CH n. 22)