
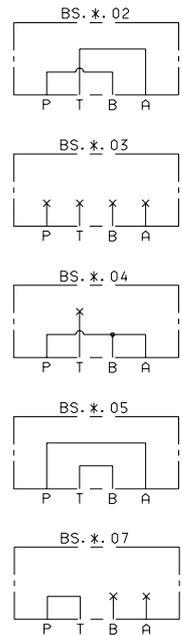


## BS2... SINGLE STATION SUBPLATE

### BS2.\*\*...

- BS** Single subplate (blanking)
- 2** CETOP 2/NG4
- \*\*** 02 / 03 / 04 / 05 / 07
- 00** No variant
- 1** Serial No.

Weight: 0,09 Kg  
 Fixing screws  
 M5x25 UNI 5931

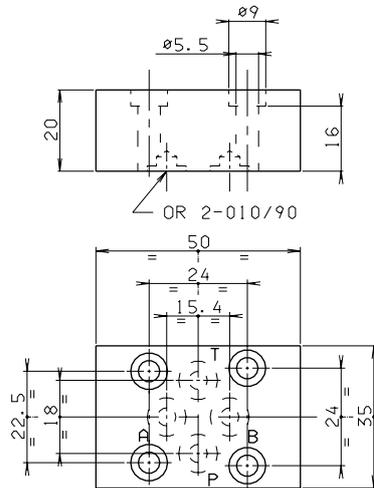



### CETOP 2 SUBPLATES

BS2**... / BS212...	
BS214...	CAP. VII • 2
BS216... / BS220...	
BS32...	CAP. VII • 3
BC250AB... / BC250PT...	
BC251...	CAP. VII • 4
BM2**... / BM260...	
BM250... / BM270...	CAP. VII • 5
	CAP. VII • 6
CMP02...	CARTRIDGE CATALOGUE

### BS212 (WITH REAR CONNECTION TO 1/4" BSP)

- BS** Single subplate
- 2** CETOP 2/NG4
- 12** 1/4" BSP rear connectors
- 00** No variant
- 1** Serial No.



Weight: 0,3 Kg  
 Fixing screws M5x35 UNI 5931

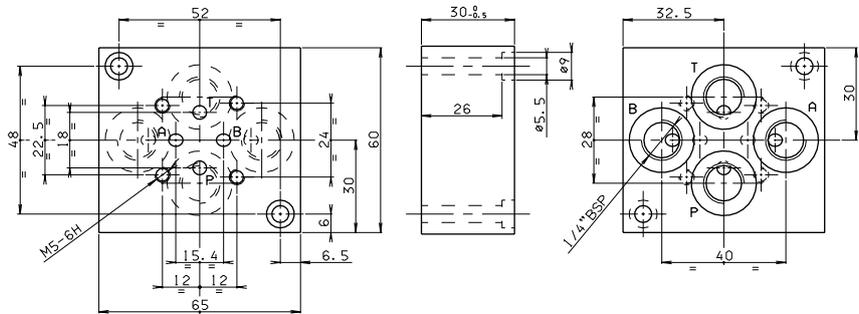

### BS214 (WITH SIDE CONNECTION TO 1/4" BSP)

- BS** Single subplate
- 2** CETOP 2/NG4
- 14** 1/4" BSP side connectors
- 00** No variant
- 1** Serial No.

Weight: 0,3 Kg  
 Fixing screws M5x35 UNI 5931

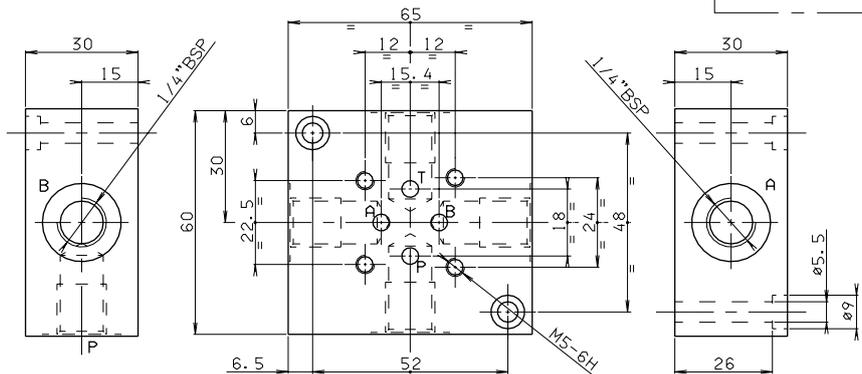


# BS2... SINGLE STATION SUBPLATE

## BS216 (WITH CONNECTORS P/T REAR, A/B SIDE TO 1/4" BSP)

- BS** Single subplate
- 2** CETOP 2/NG4
- 16** 1/4" BSP rear and side connectors
- 00** No variant
- 1** Serial No.


Weight: 0,3 Kg  
 Fixing screws M5x35 UNI 5931

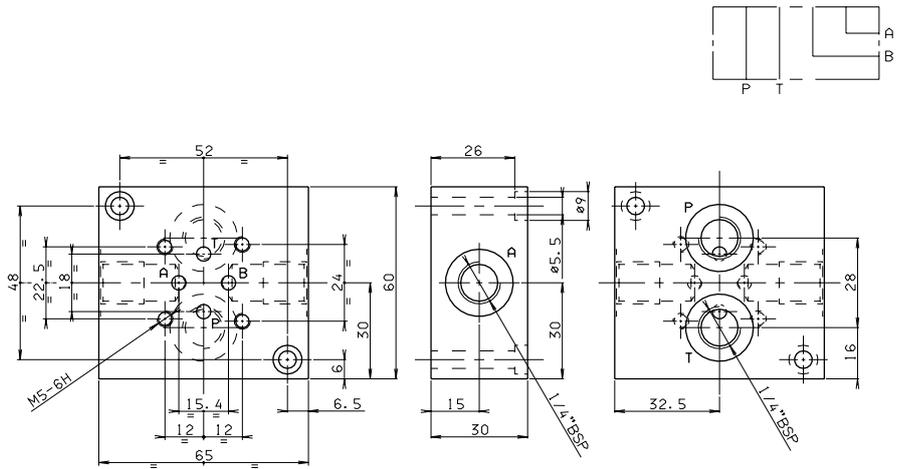

## BS220 (WITH CONNECTORS P/T REAR, A/B SIDE TO 1/4" BSP)

- BS** Single subplate
- 2** CETOP 2/NG4
- 20** 1/4" BSP rear and side connectors
- C** Type of adjustment grub screws
- \*** Setting ranges
  - 1 = max. 30 bar (**white spring**)
  - 2 = max. 90 bar (**yellow spring**)
  - 3 = max. 180 bar (**green spring**)
  - 4 = max. 250 bar (**orange spring**)
- \*\*** **00** = No variant  
**V1** = Viton
- 1** Serial No.

Weight: 0,45 Kg  
 Fixing screws M5x50 UNI 5931

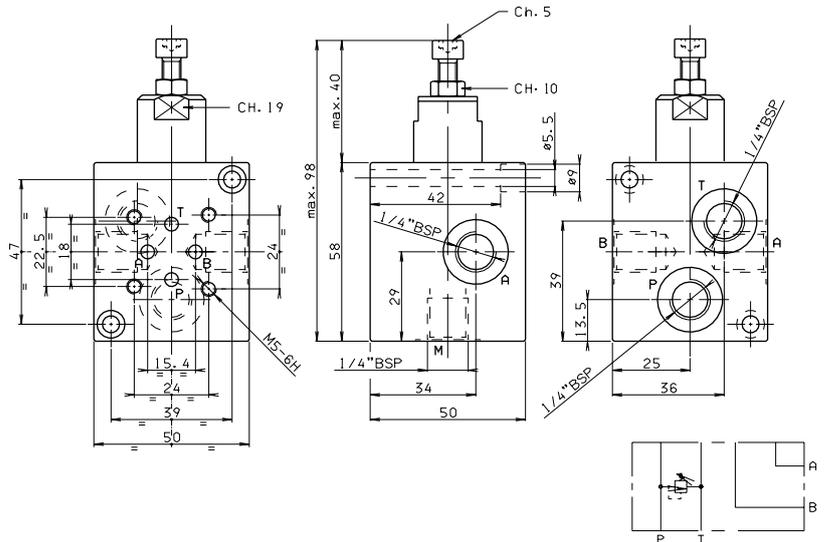


• The minimum permissible setting pressure depending on the spring:  
 see cartridge valve type CMP.02...

## BS32 (REDUCTION PLATE FROM CETOP 3/NG6 TO CETOP 2/NG4)

- BS** Single subplate
- 3** CETOP 3/NG6
- 2** CETOP 2/NG4
- 00** No variant
- 1** Serial No.

Weight: 0,12 Kg  
 Fixing screws M5x20 UNI 5931

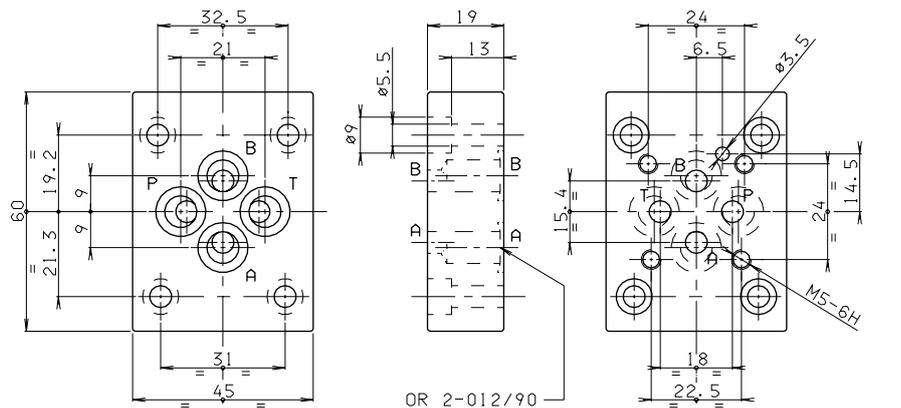

OR 2-012/90